

YQ 620 UV Pro DTF (With 3xEpsonI3200-U1 Heads)


Upgraded - AB Film roll to roll UV Crystal Label Printer



Personalized UV DTF printing automatic material collection system

Personalized customized crystal standard application scheme

The application scheme of crystal labeling is a new technology of the digital revolution. The advantage of this new technology is that it can be directly pasted and attached to the material surface to be transferred after printing, which is convenient and fast without other processing.

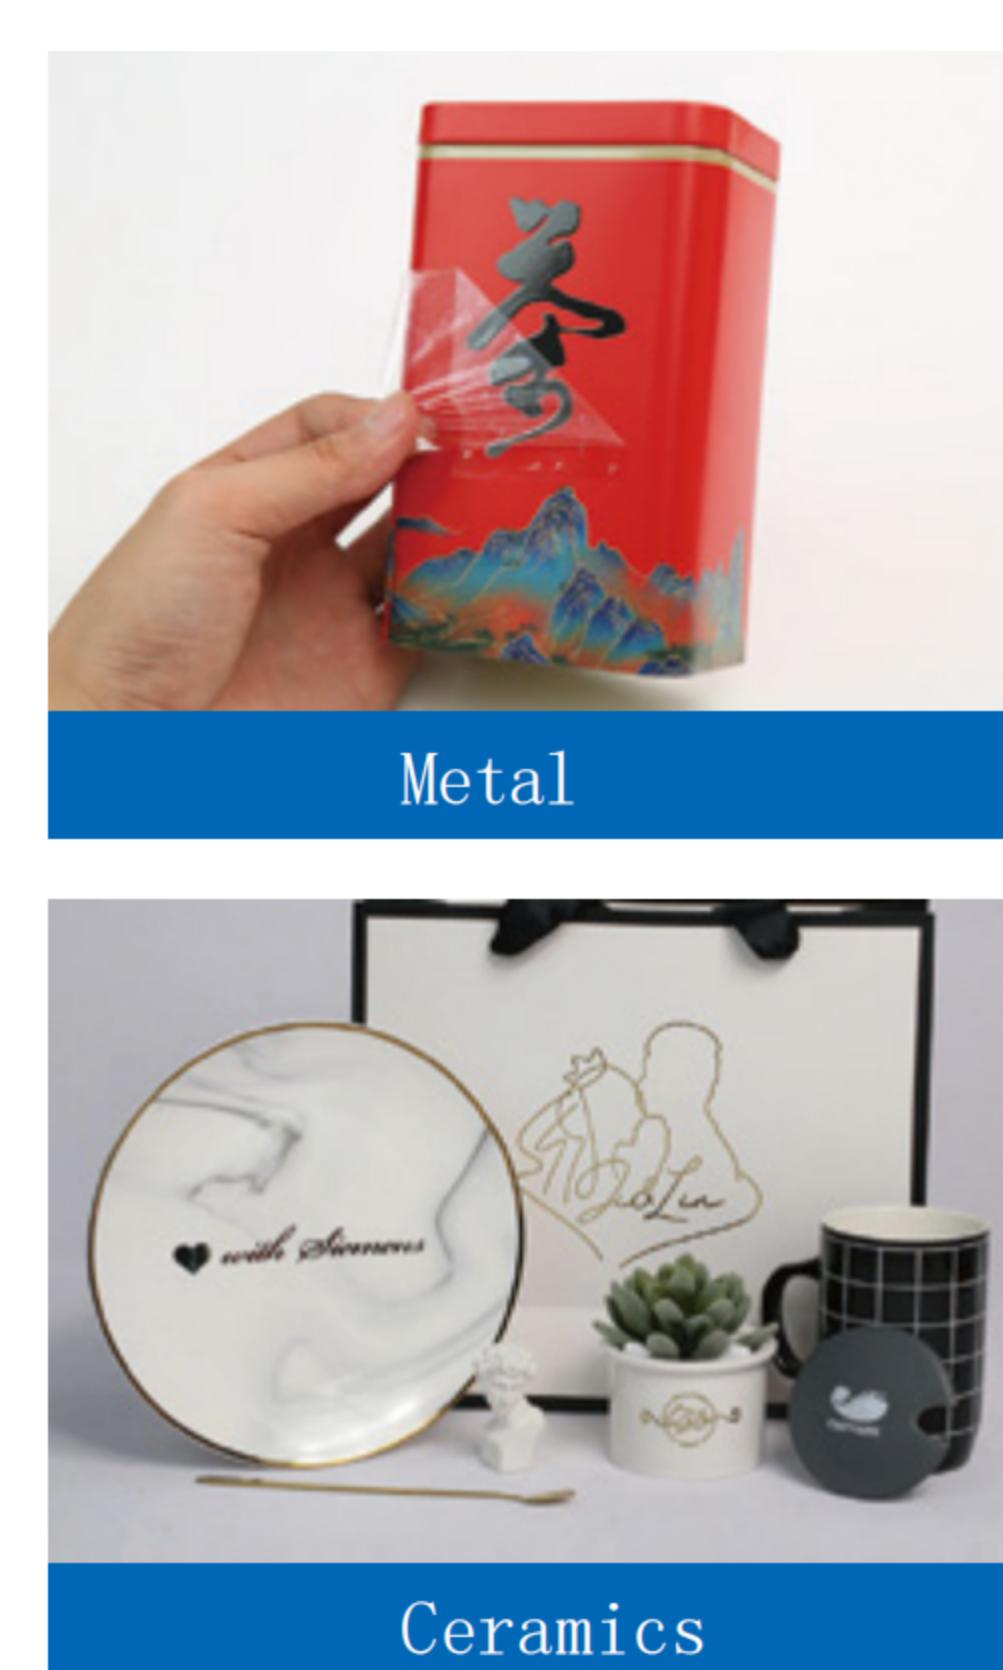

Action steps



3 x EpsonI3200-U1 print heads

- Configure 3 original EpsonI3200-U1 heads;
- Printing size: 60cm width automatic feeding system;
- Coil printing, suitable for large-scale personalized customization, easy to complete;
- Automatic mixing system for white ink and ink deficiency alarm system;
- Plastic, glass, wood, metal, leather, ceramics, etc.;

- Anti-daily scratching, very durable;
- Strong adhesion, able to adhere to the surface of 99% of the product;
- Beautiful colors and good quality of the finished product, beyond your imagination;
- Waterproof, sunscreen and oil protection, whether it is splashed in water, it will not be affected;
- Suitable for a variety of material surfaces, hard surfaces, surfaces, planes and other objects are acceptable;
- New process bronzing, hot silver, high-end customization, highlighting quality and giving more soul to products;



Wide application: Suitable for surface adhesion of various materials, plastic, glass, wood, metal, leather, ceramics, etc.

TECHNICAL PARAMETER

Model	620 Pro UV DTF	
Heads	Epson i3200-U1 x 3pcs	
Printing technology	Piezoelectric Inkjet	
Print wide	600 mm	
Medium	Width	620 mm
	Thickness	≤ 1.5 mm
Ink cartridge	Ink supply method	Color siphon + white ink timing stirring
	Color	W + CMYK + V
Printing resolution	2400 dpi	
Printing speed	8pass (720X1200dpi) : 7 sqm/h	
Ink Curing Method	Dual UV LED water-cooled lamp	
Interface	LAN	
Power Supply	AC 220V ± 10%, 50/60 HZ	
Power	3500W	
Machine size / Weight	1800 x 1000 x 1600 mm / 160 kg	
Package size / Weight	2400 x 910 x 1010 mm / 200 kg	
Environment	Power on	Temperature: 59°F to 90°F [15°C to 32°C] / Humidity: 35 to 80% (no condensation)
	Power off	Temperature: 41°F to 104°F [5°C to 40°C] / Humidity: 20 to 80% (no condensation)